
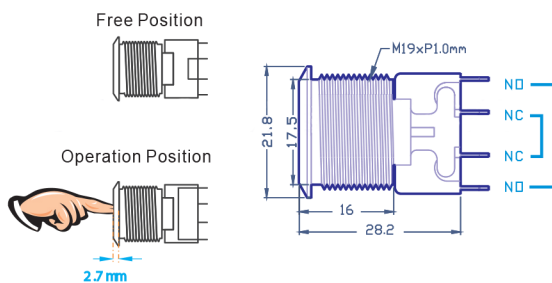


Specification

Vandal resistant 19mm exit button, momentary contact
Operation: Push button with Normally Open and Normally Closed contacts
Switch rating: 2 Amps @ 12/24Vdc
Mechanical Life: 1 million operations
IP 67 rated from front only

Dimensions in millimeters (Not to scale)

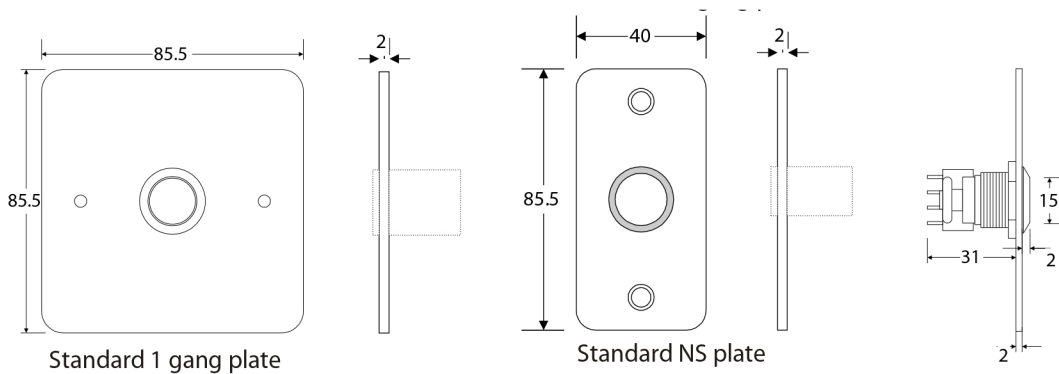

Max. Ratings : 5A@125/250 Vac
Type of actuation: Momentary
Contact arrangement: Double pole double
Operating travel: 2.7 mm
Operating temp. Range: -20~+70°C
Contact resistance: 50 m Max.(initial)
Operating life(Mechanical) : Over 100,000
Materials: Stainless steel

Disclaimers

We reserves the rights to make changes without notice in products including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Inocept Engineering assumes no responsibility or liability for the use of these products, conveys no license or title under any patent, copyrights, or mask work right to these products, and makes no representations or warranties that this products are free from patent, copyright, or mask work right infringement, unless otherwise specified.